



1.小径ブローチ・加工キー巾(F)3mm~6mm 加工物内径φ8~φ18

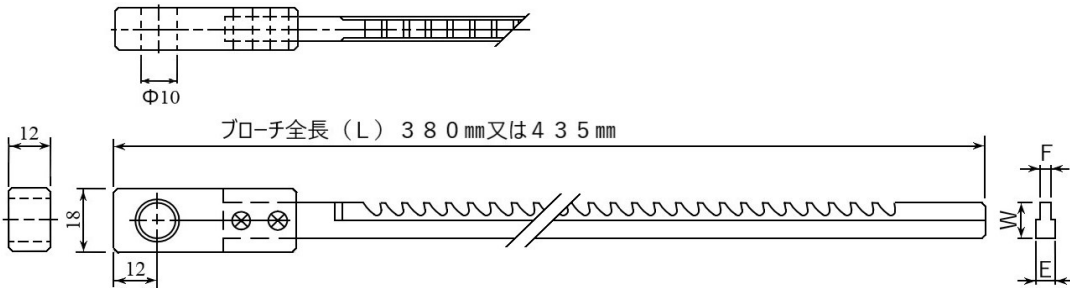


L	F	φ	W	E
380	3	8	6.5	5
	3	10	8	5
	3	12	10	5
	3	14	12	5
	4	10	8	5
	4	12	10	5
	4	14	12	5
	5	10	8	5
	5	12	10	5
	5	14	12	5
435	5	16	14	5
	6	16	12	7
	6	18	14	7
	7	16	12	7
	7	18	14	7
	5	14	11	5
	5	16	12	5

2.普通ブローチ 加工キー巾5mm、7mm~10mm

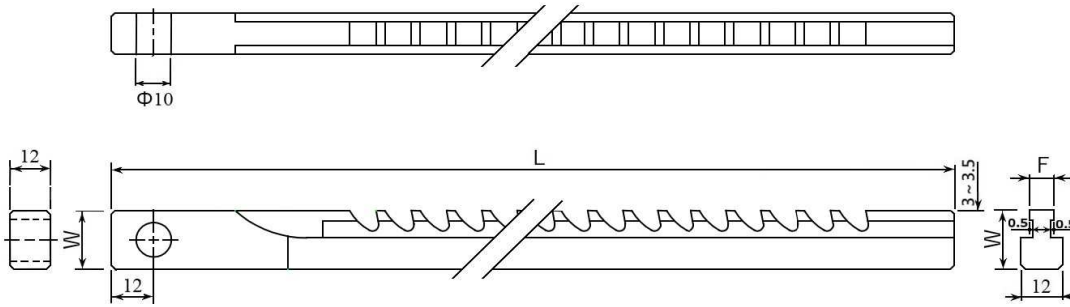


L	F	φ	W
360	5	20	15.5
	6	20	15.5
	6	22	17.5
	7	20	15.5
	7	22	17.5
	8	22	17.5
410	10	30	22
	6	22	17.5
	7	22	17.5
	8	22	17.5
460	10	30	22
	6	22	17.5
	7	22	17.5
	8	22	17.5

3.普通ブローチ(千鳥刃) 加工キー巾12mm

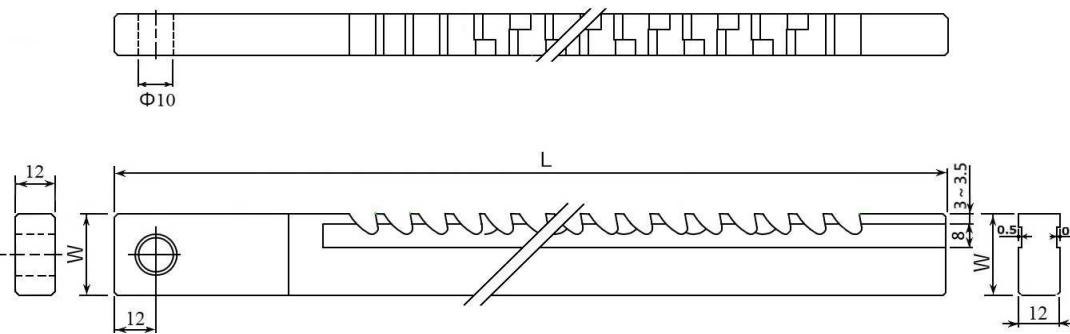

L	W
360	24
410	24
460	27

4.普通ブローチ(千鳥刃) 加工キー巾14~35mm(JIS規格サイズ及び30mm)

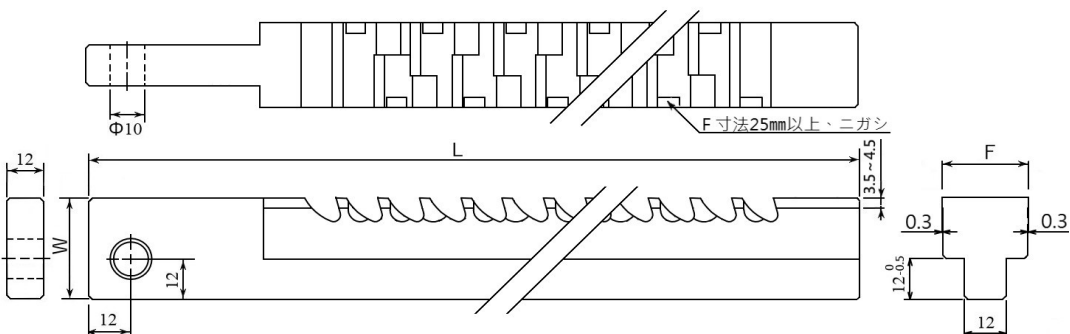

L	F	W
360	14~16	24
	18, 20	27
	22~25	30
410	14~16	24
	18, 20	27
	22~28	30
	30	35
460	14~20	27
	22~28	30
	30, 32	36
510	15, 16	27
	18~28	30
	30	36
	32, 35	38